

NEW!

Super Seal™ Pro Cap Sealer



Achieve a Perfect Seal™ with Integrated Intelligence

From the brand that's sealed billions & billions of containers comes the most intelligent cap sealer ever made.

The new Super Seal™ Pro creates hermetic seals that prevent leaks, preserve freshness & provide tamper evidence. It offers the reliability & performance Enercon is known for with powerful new features to help packagers Achieve a Perfect Seal.

WORLD CLASS RELIABILITY

ONBOARD SETUP, OPERATION TROUBLESHOOTING ASSISTANCE

REMOTE CONTROL & MONITORING

USB DRIVE FOR DATA DOWNLOADS & SOFTWARE UPGRADES

ENERGY EFFICIENT SEALING HEADS




**Innovative People.
Ensuring Your Sealing Success.**

+1.262.255.6070 / www.enerconind.com/sealing


Simple Setup, Operation, & Troubleshooting with Integrated Intelligence



A new 7" touchscreen provides operators with setup, operation, & troubleshooting assistance. QR codes link to Enercon's support website for more details & the ability to start a support case if needed.

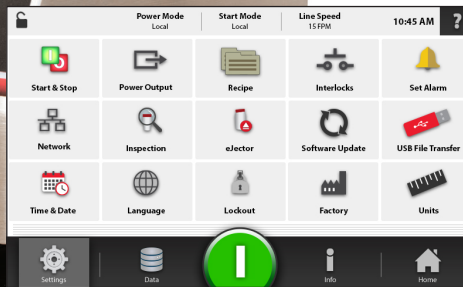

Future Proof
Software updates available in the field through USB (port) without replacing a board or removing the cover. Data downloading also available.


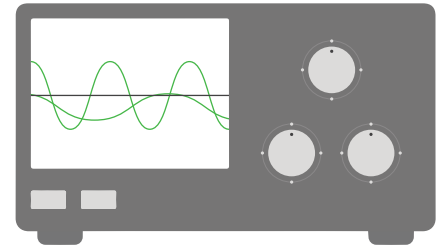


Smart Capture
Captures all critical operating data before and after a fault for diagnostic purposes. Like having a Service Engineer onsite with an Oscilloscope.

Additional Features

- Two power levels & universal input voltage (200V -240V)
- Remote start/stop and remote power control
- Network connectivity for remote control & monitoring
- Recipe management
- Multi-layer supervisory password protection
- Inspection and rejection systems
- Detailed fault, event & maintenance logging
- Stainless steel enclosure, IP55 – safe for washdown
- Designed for quick changeover
- Compatible with existing sealing heads

Energy Efficient Sealing Heads

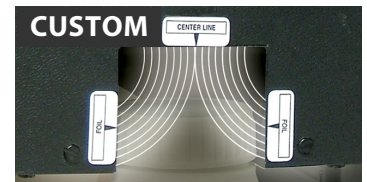

Improve Quality & Productivity with these Accessories

- FOIL DETECTION
- COCKED CAP DETECTOR
- CONTAINER BACKUP DETECTION
- STALLED CONTAINER DETECTOR
- LED BOTTLE CENTERING GUIDE
- eJECTOR CONTAINER REJECTION SYSTEM
- FLASHING LIGHT OR ALARM
- SPARE PARTS KITS

Mounting Options

Fixed floor mount or mobile cart.



Enercon systems are designed to operate in a maximum ambient temperature of 40°C (104°F) @ 80% relative humidity, non-condensing. Foil caps should never sit idle under an active sealing head.

www.enerconind.com/sealing